

AMP2121-LC SOLID STATE HIGH POWER AMPLIFIER



FEATURES

Designed for broadband EMI/RFI, Lab, Communication applications
 Suitable for all single channel modulation standards, EMC, Automotive
 Class A/AB linear Advanced technology design
 Instantaneous wide bandwidth
 Rack mounted cabinet system
 Built-in protection circuits
 Unprecedented Quiet-Cool Technology
 High reliability and ruggedness

ELECTRICAL SPECIFICATIONS: 50 Ω , 25°C

Parameter	Specification	Notes
Operating Frequency Range	80 - 1000 MHz	
Power Output @ Psat	2000 Watt Typ	CW or Pulse
Power Output @P1dB	1500 Watt Min	
Power Gain	63 dB Min	0dBm or less for rated Pout
Gain Adjustment Range	20 dB Min	Local or remote
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	-10 dB Max	
Output Impedance	50 Ohms Nom	
2-Tone Intermodulation (IMD)	-25 dBc Typ	53dBm/Tone, $\Delta = 1$ MHz
Harmonics	-20 dBc Typ	At rated output
Spurious	-60 dBc Max	Non-harmonic
Operating Voltage	180- 240 VAC, 3-Phase	47-63 Hz
Power Consumption	18 KW Max	At rated Pout
Input Power Protection	+3 dBm Max ¹	
Load VSWR Protection	4 : 1 Max ²	Foldback @ preset limit
Sample Port Coupling (optional)	-60 dB Nom	N-Female

1 Units with optional digital monitor and control, for basic units <10 Sec without damage

2 Units with optional digital monitor and control, for basic units <1 minute at rated Pout

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal Transport ³	

3 MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	2 x R7U + R5U	Cabinet with Rack drawers
Weight	225 Kg. Nom	
RF Connectors In/Out/Sample (optional)	Type-N F / 7/16-F/ Type-N-F	Front or rear panel
AC Power / Interface	MS style / 9-Pin D-Sub	Or equivalent
Cooling: Built in Quiet-Cool	Close circuit Air-liquid cooling	
OPTIONAL: Digital Monitor & Control (DMC) FWD, REV, VSWR, GAIN, ALC, V & I, TEMP, Optional Safety Interlock (INT)	Ethernet RJ-45 TCP/IP, RS422/485, USB Optional GPIB Interface Open=STBY/Short=RFON	IEEE rear panel BNC-F rear panel

e



AMP2121-LC SOLID STATE HIGH POWER AMPLIFIER


AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option RI: Rack Cabinet Integration	Standard height provided for this amp	Special height quoted separately
Option FRS: Forward RF Sample	-60dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-50dB, Type N-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring (With purchase of Option DMC)	Offset correction entry for +/- 0.2dB accuracy	10-points standard ⁴

⁴ Consult with factory if additional points would be required.


OUTLINE DRAWING

Larger rack shown with optional blank panel

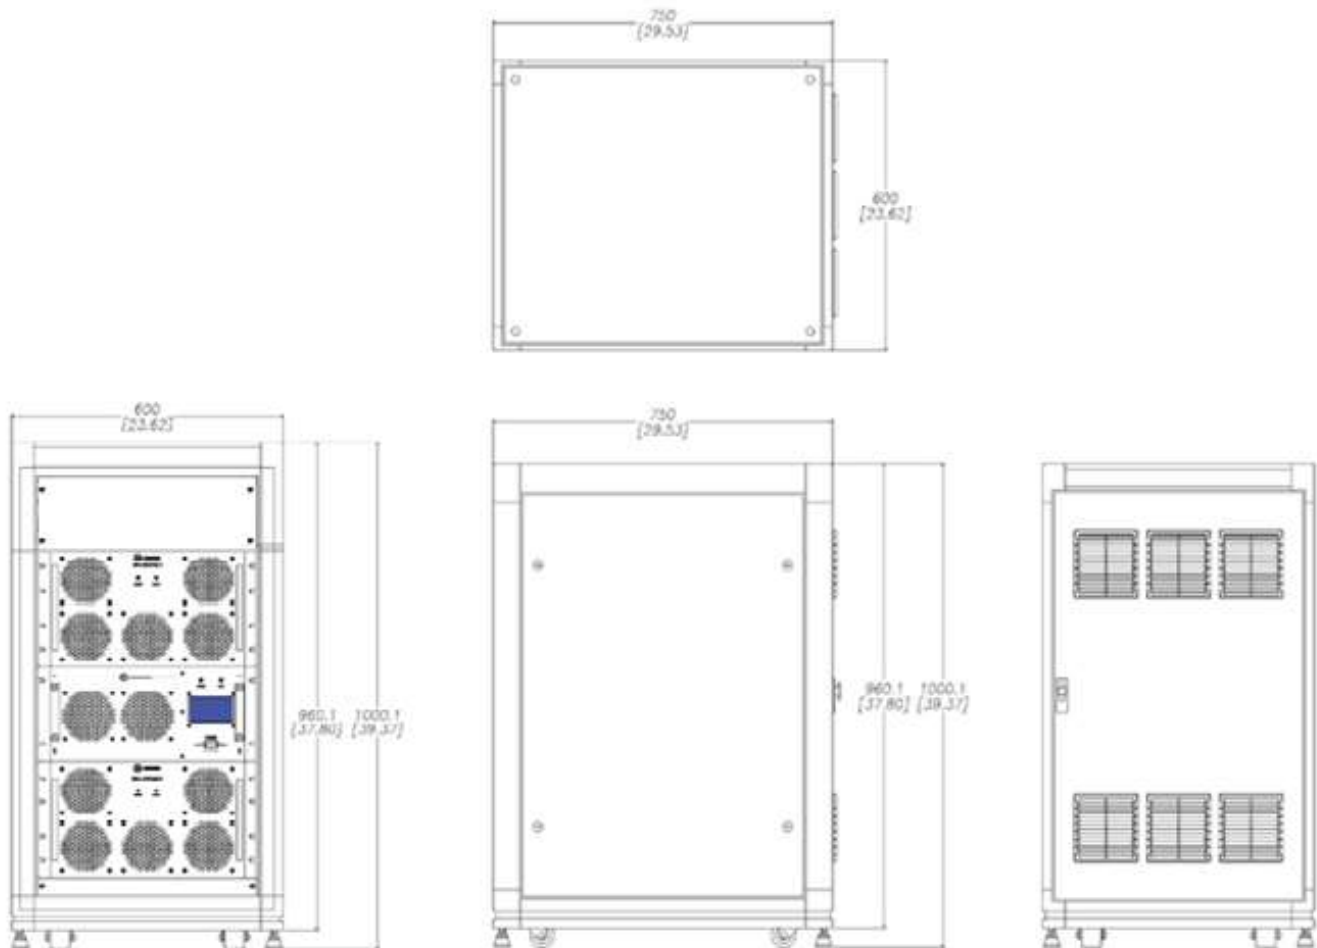

AMP2121-LC SOLID STATE HIGH POWER AMPLIFIER


- AMP2121-LC System Outline(7U + 5U + 7U)

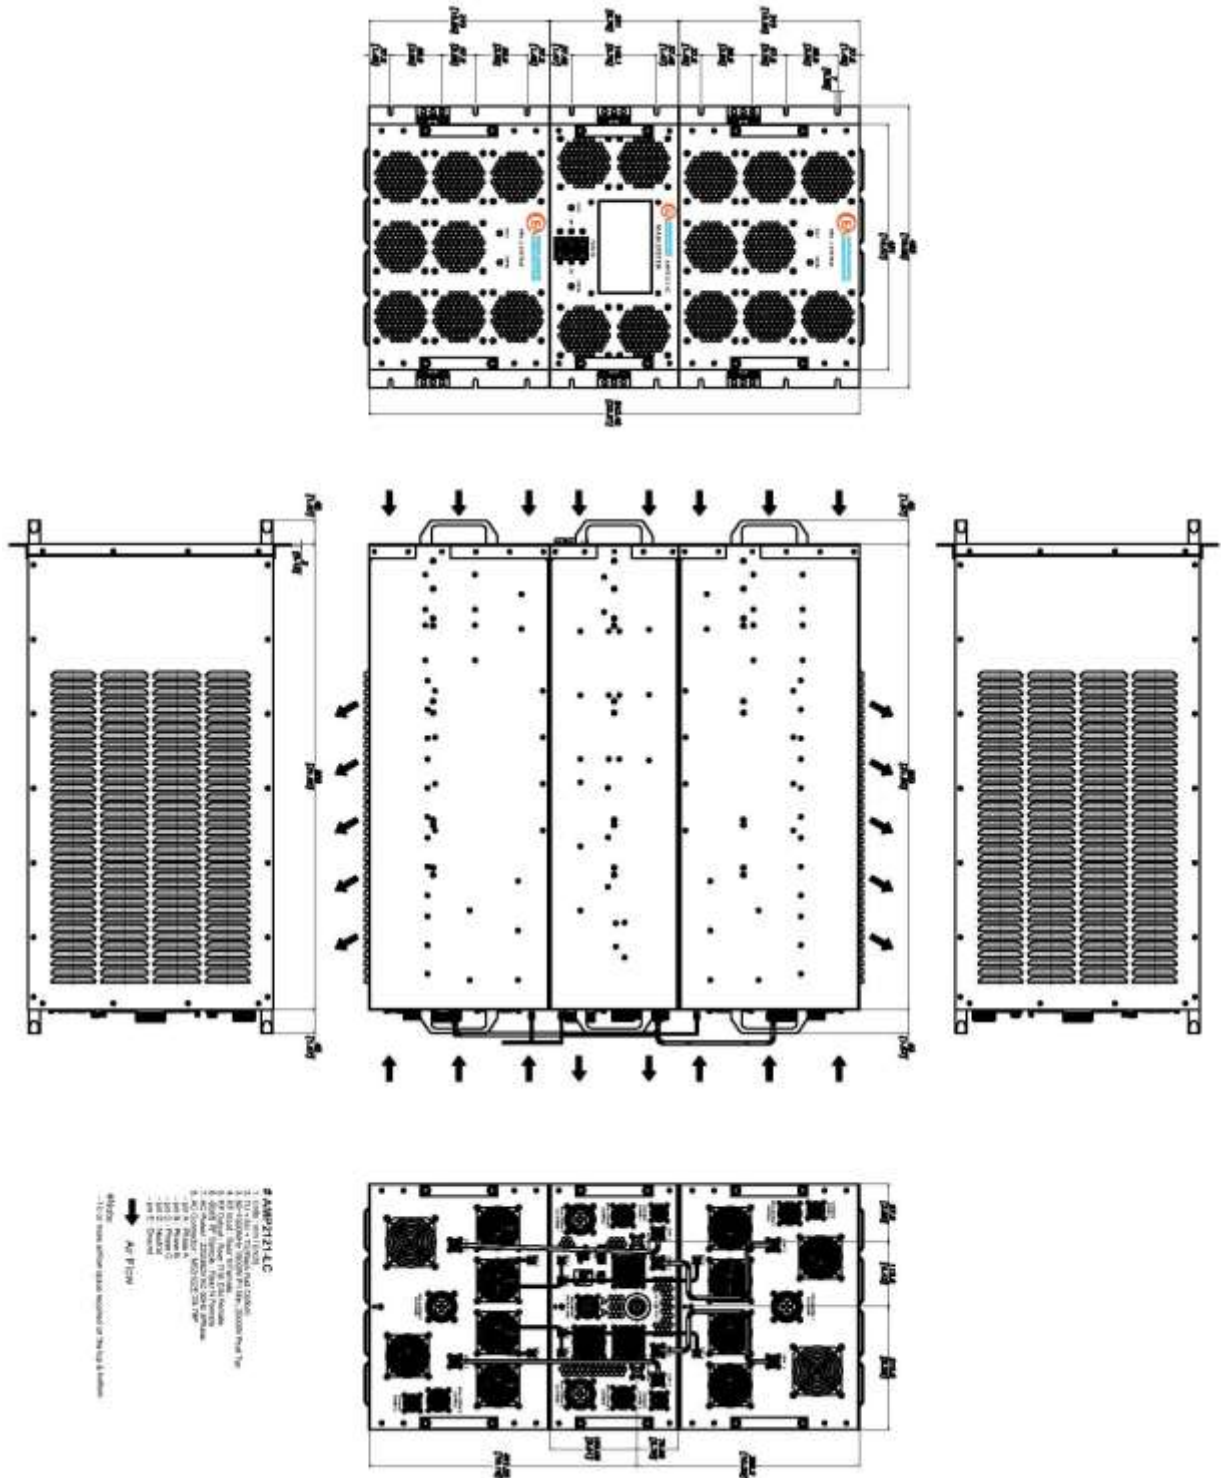

AMP2121


AMP2121-LC SOLID STATE HIGH POWER AMPLIFIER

- AMP2121-LC Main System - 5U

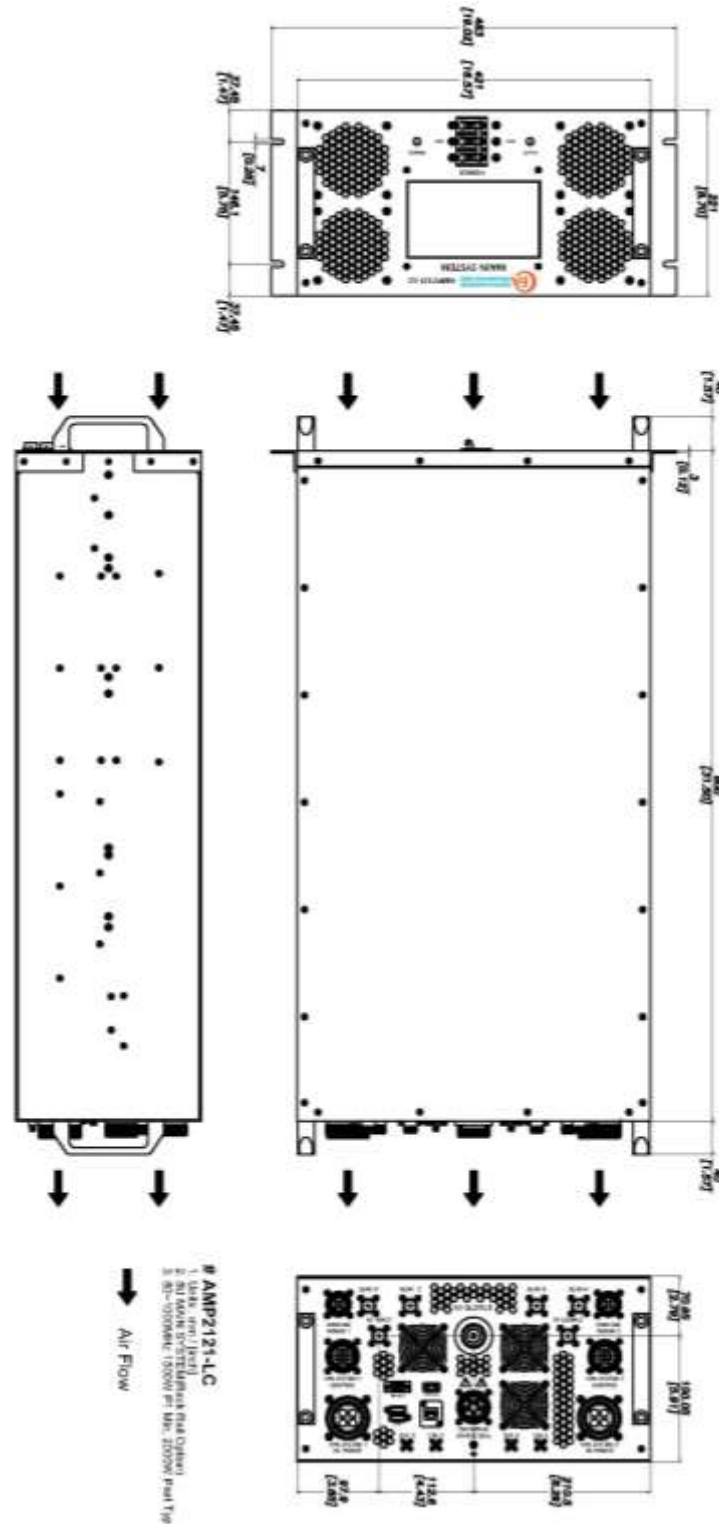

AMP2121-LC SOLID STATE HIGH POWER AMPLIFIER

- AMP2121-LC HPA 1 System - 7U

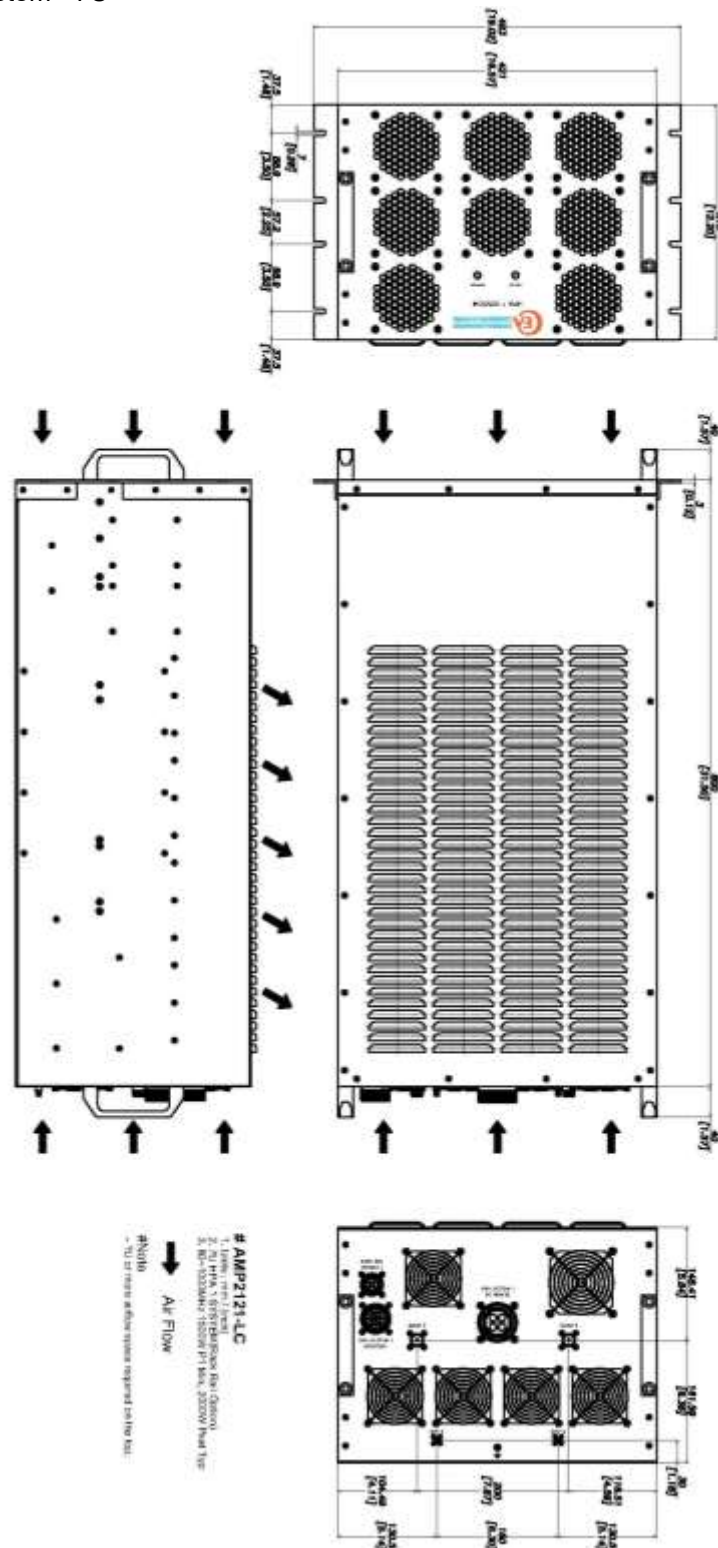

AMP2121-LC SOLID STATE HIGH POWER AMPLIFIER

- AMP2121-LC HPA 2 System - 7U

