

AMP2073BDB-LC SOLID-STATE HIGH POWER AMPLIFIER

FEATURES

Designed for EMI/RFI, lab, CW/Pulse and all communication applications Small form factor, rack mounted Dual-Band system Class A/AB Linear design


High Power Advanced technology devices Instantaneous ultra-wide bandwidth

Built-in protection circuits, with extensive monitoring

Local LCD & remote flexible interfaces

High efficiency, with unprecedented reliability and ruggedness



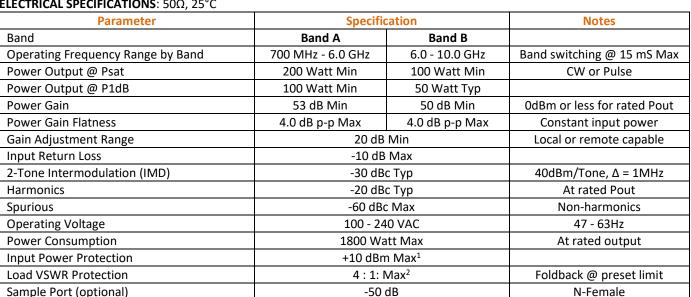

¹ Units with optional digital monitor and control, for basic units <10 Sec without damage

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	up to 95 %	Non-condensing
Altitude	3000 meters	
Shock & Vibration	Normal transport ³	

³ MIL Spec available for quotation

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 266 x 650 mm	6U, excluding handles
Weight	35 Kg. Max	
RF Conn. In / Out / Sample (optional)	N-Female	Front or rear panel
Interface Connector	9-Pin D-Sub	Rear panel
AC Power	IEC 60320-C14	Or equivalent
Cooling: Built in Quiet-Cool	Close circuit Air-liquid cooling	
OPTIONAL: Digital Monitor & Control (DMC ⁴)	Ethernet RJ-45 TCP/IP, RS422/485, USB	
FWD, REV, VSWR, GAIN, ALC, V & I, TEMP,	Optional GPIB Interface	IEEE rear panel
Optional Safety Interlock (INT)	Open=STBY/Short=RFON	BNC-F rear panel

⁴ Controller will reduce output power by up to typically 0.5dB.

² Units with optional digital monitor and control, for basic units <1 minute at rated Pout



AMP2073BDB-LC SOLID-STATE HIGH POWER AMPLIFIER

AVAILABLE SPECIAL OPTIONS

Parameter	Specification	Notes
Option FRS: Forward RF Sample	-50dB, Type N-Female	Front or rear panel
Option RRS: Reflected RF Sample	-40dB, Type N-Female	Front or rear panel
Option GPIB: GPIB remote control	GPIB IEEE-488 Remote capability	
Included CPM: Calibrated Power Monitoring	Offset correction entry for +/- 0.2dB accuracy	11-points standard ⁵
(With purchase of Option DMC)		

⁵ Consult with factory if additional points would be required.

OUTLINE DRAWINGSHOWN WITH OPTIONAL LCD DIGITAL CONTROLLER

